

PREMiA **EM**

PBV/PBF20-25N3(R)(S) Series

PLATFORM POWER PALLET TRUCKS

2.0 - 2.5 ton

**SMALL IN SIZE...
BIG ON PERFORMANCE**

The PREMiA EM range is available in three variations: foldable platform, fixed platform rear entry, and fixed platform side entry. Each truck is available in either 2 ton or 2.5 ton capacities. All trucks feature a heavy-duty chassis in 3 possible sizes: mini, junior and senior to suit all battery requirements. The mini chassis is also the shortest on the market.

SPECIFICATIONS

PBV20N3	PBF20N3R	PBF20N3S
PBV25N3	PBF25N3R	PBF25N3S



**WHEN
RELIABILITY IS
EVERYTHING...**

PREMI^A EM

PBV/PBF20-25N3(R)(S) Series

PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 ton



The patented DriveSteady system ensures outstanding drive wheel pressures, excellent shock absorption and side stability when cornering - making PREMIA EM a milestone power pallet truck.

The ergonomically shaped ErgoSteer tiller head features easily accessible controls that allow the operator to manoeuvre the truck comfortably, safely and intuitively, keeping their focus on the job at hand.

Within PREMIA EM, connectors and sensors are sealed to protect from dust, water and debris, enabling long service intervals, less maintenance and maximum uptime.

BRAKES

- **Parking brake**
Automatically activated

DRIVE

- **Powerful, sealed AC motor**
High torque for greater efficiency. No carbon brushes mean lower servicing requirements.
- **Sealed transmission**
Shock-resistant, quiet and requires little maintenance.
- **Dust-shielded load wheels**
Less maintenance and component replacement required.



ELECTRICAL AND CONTROL SYSTEMS

- **Waterproof wiring and connectors**
Sealed compartment prevents system failure and corrosion from water and dust.
- **Combi controller lift system**
Proportional rocker switch control for lifting and lowering.
- **Versatile battery compartment**
Accommodates traditional DIN or BS size batteries to ensure maximum compatibility with user equipment.
- **Battery access**
Battery can be accessed from above to check electrolyte status or (optional) pulled out on steel rollers for battery change over.
- **Mounted battery plug**
Plug is contained within a tray so there is a reduced risk of loose cables getting caught when changing the battery.

FORKS

- **Robust forks**
Strong welded construction with rounded tips for effortless pallet entry.
- **Market-leading lift height of 220mm**
Ideal for handling on steep ramps, loading docks and uneven surfaces, even when using recycled pallets.
- **Tapered forks**
Helps make access to pallets in racks or block stacks quick and easy.

FRAME AND BODY

- **Two linked castor wheels**
In addition to the load wheels for added stability. Provides comfort for the driver and load stabilization.
- **Shared components in low lifters**
Service costs and downtime are kept to a minimum.
- **DriveSteady**
Innovative patented traction, dampening and stability systems are all optimised to accommodate exceptional damping and work in close harmony with a unique castor wheel design, providing unequalled comfort on uneven surfaces while maintaining stability when cornering.
- **Steel rear bumper**
Bumper is angled low to help protect the operator's feet.
- **Compact chassis**
Robust and highly optimised to be the shortest in its class.



PREMIA EM

PBV/PBF20-25N3(R)(S) Series

PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 ton

OPERATOR COMPARTMENT AND CONTROLS

- **PIN-code access**
Stops unauthorised truck use and keeps you aware of who's operating at all times.
- **Choice of three operating modes (PRO, ECO and Easy)**
Different driver modes: PRO for advanced drivers, ECO for low energy consumption, Easy for sensitive goods or beginners.
- **Ergonomic ErgoSteer tiller head**
Weather-protected and impact-resistant tiller head with large, easy-to-reach buttons placed at an ergonomic distance for reduced fatigue and safer operation. IP65 rated.
- **Long tiller arm**
The standard mechanical steering option offers easy steering for low-intensity work.
- **Power steering**
Power steering on short tiller arm has a reduced steering angle for comfortable, precise control and smooth cornering. (Option on PBVN3 models).
- **TractionPlus**
Spring-loaded and hydraulic system works with DriveSteady to continuously and proportionally increase drive wheel pressure. This helps to ensure optimum traction by increasing load weight on all surfaces for highest productivity.

- **Comfort steering**
Together, the electric-powered steering without arm and the ergonomic platform help reduce operator fatigue. (Standard on PBF20 / 25N3S, option on PBF20 / 25N3R)
- **Ultra-low step height**
Operators stay more productive throughout shifts thanks to easy on/off access - an important feature on side entry trucks frequently used for order picking operations.
- **Dampened platform**
Foldable platforms and side/rear entry platforms are dampened to help minimize vibrations and bumps for greater operator comfort. (All models).
- **Adjustable EasyRide electric dampening**
Unique electric dampening capability allows operator to adjust the platform to their weight - ideal for applications on ramps or loading docks. (Option on side / rear entry platform trucks).
- **Foot protection**
If the operator's foot is outside of the platform, the truck reduces speeds and stops. (rear entry models only)
- **Foldable side bars**
High, cushioned ergonomic side bars can be moved up or down and can be quickly switched to suit different operations.
- **Cast iron driver platform**
Robust and cushioned.
- **Battery discharge indicator**
Fitted as standard for battery protection and preventing deep discharge.

- **Multi-function display**
Shows truck mode, status and drive speeds using easy to read icons, as well as error codes. (option)

OTHER FEATURES

- **RapidAccess features**
These allow quick and easy entry to all areas for checks and maintenance.
- **Storage compartment**
Operator can store tools and other required items.



VDI - PERFORMANCE & DIMENSIONS


CHARACTERISTICS					
1.1	Manufacturer			Mitsubishi Forklift Trucks Mitsubishi Forklift Trucks	
1.2	Manufacturer's model designation			PBV20N3	PBV25N3
1.3	Power source			electric	electric
1.4	Operator type			Pedestrian / stand-on	Pedestrian / stand-on
1.5	Load capacity	Q	kg	2000	2500
1.6	Load center distance	c	mm	600	600
1.8	Load wheel axle to fork face (forks lowered)	x	mm	975	975
1.9	Wheelbase	y	mm	1437	1437
WEIGHT					
2.1	Truck weight without load, with maximum battery weight			kg	750 / 750
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side			kg	1015 / 1742 / 1128 / 2129
2.3	Axle loadings without load & with maximum battery weight, drive / load side			kg	570 / 187 / 570 / 187
WHEELS, DRIVE TRAIN					
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side			Vul / Vul / Vul / Vul	
3.2	Tyre dimensions, drive side			mm 235 x 75 / 235 x 75	
3.3	Tyre dimensions, load side			mm 85 x 75 / 85 x 75	
3.4	Castor wheel dimensions (diameter x width)			mm 150 x 60 / 150 x 60	
3.5	Number of wheels, load / drive side (x = driven)			1 / 2 / 4 / 1 / 2 / 4	
3.6	Track width (center of tyres), drive side	b10	mm	520	
3.7	Track width (center of tyres), load side	b11	mm	b5 - 175 / b5 - 175	
DIMENSIONS					
4.4	Lift height	h3	mm	135 / 135	
4.8	Seat- or stand height	h7	mm	171 / 171	
4.9	Height of tiller arm / steering console (min./max.)	h14	mm	1099 / 1512 / 1099 / 1512	
4.15	Fork height, fully lowered	h13	mm	85 / 85	
4.19	Overall length	l1	mm	1880 / 2256 / 1880 / 2256	
4.20	Length to fork face	l2	mm	730 / 1106 ¹⁾ / 730 / 1106 ¹⁾	
4.21	Overall width	b1/b2	mm	740 / 740	
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm	60 / 175 / 1150 / 60 / 175 / 1150	
4.25	Outside width over forks (minimum / maximum)	b5	mm	540 / 540	
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm	25 / 25	
4.33c	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast	mm	2472 / 2825 / 2472 / 2825	
4.33d	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast3	mm	1953 / 2306 / 1953 / 2306	
4.34c	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast	mm	2358 / 2711 / 2358 / 2711	
4.34d	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast3	mm	2153 / 2506 / 2153 / 2506	
4.35	Turning radius	Wa	mm	1666 / 2019 / 1666 / 2019	
PERFORMANCE					
5.1	Travel speed, with / without load			km/h	10 / 10 ²⁾ / 10 / 10 ²⁾
5.2	Lifting speed, with / without load			m/s	0.07 / 0.09 / 0.07 / 0.09
5.3	Lowering speed, with / without load			m/s	0.12 / 0.09 / 0.11 / 0.09
5.7	Gradeability, with / without load			%	14 / 22 / 11 / 22
5.9	Acceleration time (10 meters) with / without load			s	6.1 / 5.3 / 6.5 / 5.3
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)				Electric / Electric
ELECTRIC MOTORS					
6.1	Drive motor capacity (60 min. short duty)			kW	2.4 / 2.4
6.2	Lift motor output at 15% duty factor			kW	2.2 / 2.2
6.4	Battery voltage/capacity at 5-hour discharge			V/Ah	24 / 240-300 / 24 / 240-300
6.5	Battery weight			kg	250 - 300 / 250 - 300
6.6b	Energy consumption according to VDI 60 cycle			kWh / h	0.40 / 0.42
MISCELLANEOUS					
8.1	Type of drive control				Stepless / Stepless
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpAZ			dB(A)	62 / 64

- Value may differ by battery compartment size. Smallest battery compartment shown.
 - 10.5 / 12.0 kmh with Power Steering and tandem wheels
 - Comfort steering
- Please refer to the 'CHASSIS & BATTERY' tables, or ask your dealer for full details.

PREMIA EM

PBV20-25N3 Series PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 ton

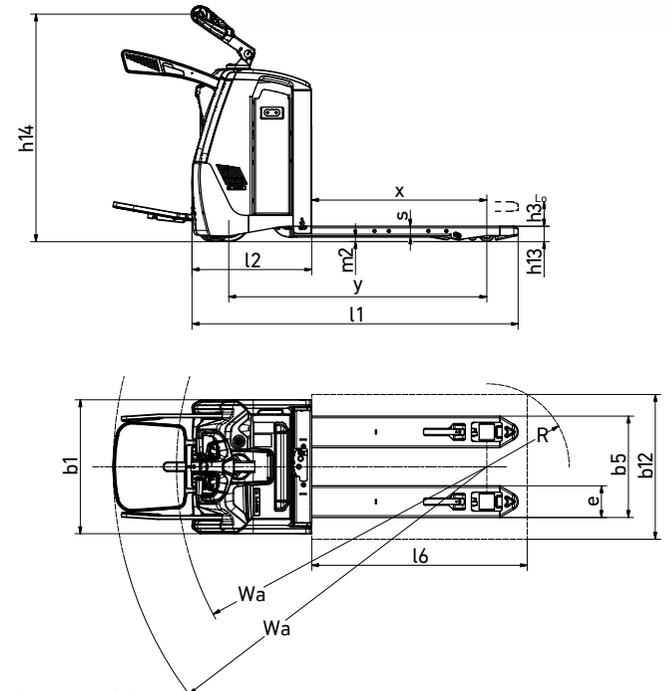

Ast = Wa-x+l6+200
Ast = Working aisle width
Wa = Turning radius

VDI - PERFORMANCE & DIMENSIONS



CHARACTERISTICS				Mitsubishi Forklift Trucks		Mitsubishi Forklift Trucks	
1.1	Manufacturer			PBF20N3R	PBF25N3R		
1.2	Manufacturer's model designation			electric	electric		
1.3	Power source			Stand-on	Stand-on		
1.4	Operator type						
1.5	Load capacity	Q	kg	2000	2500		
1.6	Load center distance	c	mm	600	600		
1.8	Load wheel axle to fork face (forks lowered)	x	mm	975	975		
1.9	Wheelbase	y	mm	1437	1437		
WEIGHT							
2.1	Truck weight without load, with maximum battery weight		kg	820	820		
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side		kg	1216 / 1691	1270 / 2110		
2.3	Axle loadings without load & with maximum battery weight, drive / load side		kg	648 / 169	648 / 169		
WHEELS, DRIVE TRAIN							
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side			Vul / Vul	Vul / Vul		
3.2	Tyre dimensions, drive side		mm	235 x 75	235 x 75		
3.3	Tyre dimensions, load side		mm	85 x 75	85 x 75		
3.4	Castor wheel dimensions (diameter x width)		mm	150 x 60	150 x 60		
3.5	Number of wheels, load / drive side (x = driven)			1 / 2 / 4	1 / 2 / 4		
3.6	Track width (center of tyres), drive side	b10	mm	520	520		
3.7	Track width (center of tyres), load side	b11	mm	b5 - 175	b5 - 175		
DIMENSIONS							
4.4	Lift height	h3	mm	135	135		
4.8	Seat- or stand height	h7	mm	170	170		
4.9	Height of tiller arm / steering console (min./max.)	h14	mm	1119 / 1428	1119 / 1428		
4.15	Fork height, fully lowered	h13	mm	85	85		
4.19	Overall length	l1	mm	2292	2292		
4.20	Length to fork face	l2	mm	1141 ¹⁾	1141 ¹⁾		
4.21	Overall width	b1/b2	mm	740	740		
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm	60 / 175 / 1150	60 / 175 / 1150		
4.25	Outside width over forks (minimum / maximum)	b5	mm	540	540		
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm	25	25		
4.33a	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise	Ast	mm	2865	2865		
4.33b	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise	Ast3	mm	2346	2346		
4.34a	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise	Ast	mm	2751	2751		
4.34b	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise	Ast3	mm	2546	2546		
4.35	Turning radius	Wa	mm	2059	2059		
PERFORMANCE							
5.1	Travel speed, with / without load		km/h	10 / 10 ²⁾	10 / 10 ²⁾		
5.2	Lifting speed, with / without load		m/s	0.07 / 0.09	0.07 / 0.09		
5.3	Lowering speed, with / without load		m/s	0.12 / 0.09	0.11 / 0.09		
5.7	Gradeability, with / without load		%	13 / 15	11 / 22		
5.9	Acceleration time (10 meters) with / without load		s	6.1 / 5.3	6.5 / 5.3		
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric	Electric		
ELECTRIC MOTORS							
6.1	Drive motor capacity (60 min. short duty)		kW	2.4	2.4		
6.2	Lift motor output at 15% duty factor		kW	2.2	2.2		
6.4	Battery voltage/capacity at 5-hour discharge		V/Ah	24 / 240-300	24 / 240-300		
6.5	Battery weight		kg	250 - 300	250 - 300		
6.6b	Energy consumption according to VDI 60 cycle		kWh / h	0.40	0.42		
MISCELLANEOUS							
8.1	Type of drive control			Stepless	Stepless		
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpAZ		dB(A)	62	64		

- Value may differ by battery compartment size. Smallest battery compartment shown.
 - 10.5 / 12.0 kmh with Power Steering and tandem wheels
 - Comfort steering
- Please refer to the 'CHASSIS & BATTERY' tables, or ask your dealer for full details.

PREMIA EM

PBF20-25N3R Series PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 ton

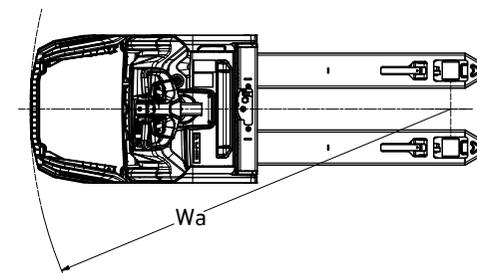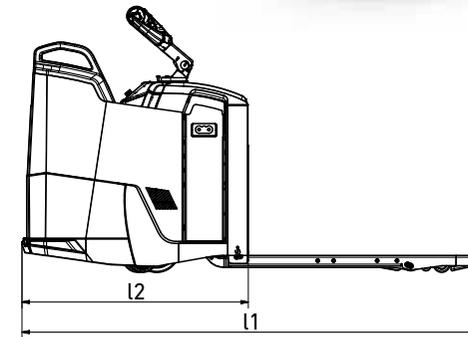

Ast = Wa-x+l6+200
Ast = Working aisle width
Wa = Turning radius

VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS				Mitsubishi Forklift Trucks Mitsubishi Forklift Trucks	
1.1	Manufacturer			PBF20N3S	PBF25N3S
1.2	Manufacturer's model designation			electric	electric
1.3	Power source			Stand-on	Stand-on
1.4	Operator type				
1.5	Load capacity	Q	kg	2000	2500
1.6	Load center distance	c	mm	600	600
1.8	Load wheel axle to fork face (forks lowered)	x	mm	975	975
1.9	Wheelbase	y	mm	1437	1437
WEIGHT					
2.1	Truck weight without load, with maximum battery weight		kg	800	800
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side		kg	1202 / 1688	1193 / 2107
2.3	Axle loadings without load & with maximum battery weight, drive / load side		kg	634 / 166	643 / 166
WHEELS, DRIVE TRAIN					
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side			Vul / Vul	Vul / Vul
3.2	Tyre dimensions, drive side		mm	235 x 75	235 x 75
3.3	Tyre dimensions, load side		mm	85 x 75	85 x 75
3.4	Castor wheel dimensions (diameter x width)		mm	150 x 60	150 x 60
3.5	Number of wheels, load / drive side (x = driven)			1 / 2 / 4	1 / 2 / 4
3.6	Track width (center of tyres), drive side	b10	mm	520	520
3.7	Track width (center of tyres), load side	b11	mm	b5 - 175	b5 - 175
DIMENSIONS					
4.4	Lift height	h3	mm	135	135
4.8	Seat- or stand height	h7	mm	170	170
4.9	Height of tiller arm / steering console (min./max.)	h14	mm	1130 / 1297	1130 / 1297
4.15	Fork height, fully lowered	h13	mm	85	85
4.19	Overall length	l1	mm	2292	2292
4.20	Length to fork face	l2	mm	1141 ¹⁾	1141 ¹⁾
4.21	Overall width	b1/b2	mm	740	740
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm	60 / 175 / 1150	60 / 175 / 1150
4.25	Outside width over forks (minimum / maximum)	b5	mm	540	540
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm	25	25
4.33a	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise	Ast	mm	2865	2865
4.33b	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise	Ast3	mm	2346	2346
4.34a	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise	Ast	mm	2751	2751
4.34b	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise	Ast3	mm	2546	2546
4.35	Turning radius	Wa	mm	2059	2059
PERFORMANCE					
5.1	Travel speed, with / without load		km/h	10 / 10 ²⁾	10 / 10 ²⁾
5.2	Lifting speed, with / without load		m/s	0.07 / 0.09	0.07 / 0.09
5.3	Lowering speed, with / without load		m/s	0.12 / 0.09	0.11 / 0.09
5.7	Gradeability, with / without load		%	13 / 15	11 / 22
5.9	Acceleration time (10 meters) with / without load		s	6.1 / 5.3	6.5 / 5.3
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric	Electric
ELECTRIC MOTORS					
6.1	Drive motor capacity (60 min. short duty)		kW	2.4	2.4
6.2	Lift motor output at 15% duty factor		kW	2.2	2.2
6.4	Battery voltage/capacity at 5-hour discharge		V/Ah	24 / 240-300	24 / 240-300
6.5	Battery weight		kg	250 - 300	250 - 300
6.6b	Energy consumption according to VDI 60 cycle		kWh / h	0.40	0.42
MISCELLANEOUS					
8.1	Type of drive control			Stepless	Stepless
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpAZ		dB(A)	62	64

1) Value may differ by battery compartment size. Smallest battery compartment shown.

2) 10.5 / 12.0 kmh with Power Steering and tandem wheels

3) Comfort steering

Please refer to the 'CHASSIS & BATTERY' tables, or ask your dealer for full details.


Note: Equipping this model (these models) with a power source (e.g. Lithium-ion, Hydrogen Fuel cell, etc.) that has not been previously approved by the factory is considered a modification. Per OSHA 1910.178 and ANSI/ITSDF B56.1, please consult with your factory representative prior to installing any non-OEM power source that has not been previously approved.

PREMIA EM

PBF20-25N3S Series

PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 ton

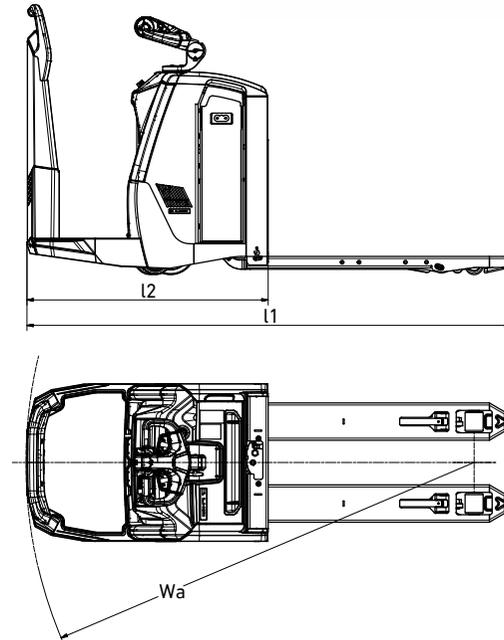

Ast = Wa-x+l6+200
Ast = Working aisle width
Wa = Turning radius

STANDARD EQUIPMENT & OPTIONS

PREMIA EM PBV/PBF20-25N3(R)(S) Series PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 ton

- = Standard
- = Option

	PBV20N3	PBV25N3	PBF20N3R	PBF25N3R	PBF20N3S	PBF25N3S
GENERAL						
Micro-computer incl. Hour meter and battery indicator.	●	●	●	●	●	●
Standard display incl. Hour meter and battery indicator	●	●	●	●	●	●
Foldable platform	●	●	-	-	-	-
Fixed platform, rear entry	-	-	●	●	-	-
Fixed platform, side entry	-	-	-	-	●	●
Mechanical tiller arm	●	●	-	-	-	-
Power tiller arm	●	●	●	●	-	-
Comfort tiller arm	-	-	●	●	-	●
Crossway pallet indication on forks and marking on fork tips	●	●	●	●	●	●
Chill store design, down to -10°C	●	●	●	●	●	●
Speed regulated lift motor	●	●	●	●	●	●
On/off valve for lowering, controlled by rocker switch on tiller head	●	●	●	●	●	●
Vulkollan drive wheel	●	●	●	●	●	●
Tandem load wheels vulkollan	●	●	●	●	●	●
Single load wheel	●	-	●	-	●	-
Closed pallet entry/exit	●	●	●	●	●	●
Quick release of battery lock	●	●	●	●	●	●
Battery rollers	●	●	●	●	●	●
Lead acid batteries	●	●	●	●	●	●
ENVIRONMENT						
Cold store design, 0°C to -30°C	●	●	●	●	●	●
DRIVE AND LIFT CONTROLS						
Heavy duty tiller Head - with key switch entry	●	●	●	●	●	●
Tiller up drive	●	●	-	-	-	-
WHEEL OPTIONS						
Vulkollan	●	●	●	●	●	●
Tractothan	●	●	●	●	●	●
Super grip	●	●	●	●	●	●



Multifunction color display



Standard display



Crossway pallet indication on forks



Mechanical tiller arm



Power tiller arm



Comfort tiller arm

STANDARD EQUIPMENT & OPTIONS

● = Standard
● = Option

	PBV20N3	PBV25N3	PBF20N3R	PBF25N3R	PBF20N3S	PBF25N3S
Power steering						
Multifunction display incl. BDI&Hourmeter, PIN code login(100 codes) and graphic icons	●	●	●	●	●	●
Load backrest	●	●	●	●	●	●
Multi purpose tray	●	●	●	●	●	●
Key switch entry	●	●	●	●	●	●
12V DC Power Socket	●	●	●	●	●	●
5 V USB socket	●	●	●	●	●	●
Equipment bar	●	●	●	●	●	●
Writing desk incl. RAM C holder	●	●	●	●	●	●
Equipment bar holder RAM system size C	●	●	●	●	●	●
Equipment bar holder RAM system size C, 2 pcs	●	●	●	●	●	●
Equipment bar holder RAM size D	●	●	●	●	●	●
Working lights LED						
Increased drive speed with/without load 10,5/12,5 km/h(only in combination with power steering)	●	●	●	●	●	●
Active Spin Reduction	●	●	●	●	●	●
Battery creep	●	●	●	●	●	●
Battery level audible warning	●	●	●	●	●	●
Service alarm	●	●	●	●	●	●
Automatic log off	●	●	●	●	●	●
Revert to low speed at log off	●	●	●	●	●	●
Revert to low speed at operator absent	●	●	●	●	●	●

PREMIA EM


PBV/PBF20-25N3(R)(S) Series

PLATFORM POWER PALLET TRUCKS

2.0 – 2.5 ton



Load backrest

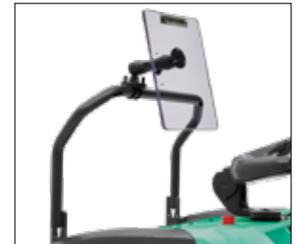

Equipment bar



Working lights LED

CHASSIS & BATTERY DIMENSIONS

BATTERY COMPARTMENT SIZE			BATTERY 24 V type	BATTERY CAPACITY, Ah	BATTERY COMPARTMENT		CELL TYPE	WEIGHT OF BATTERY, kg	APPROXIMATE WEIGHT OF TRUCK, kg
Mini	Junior	Senior	Lead-Acid		Lift out	Steel rollers		Min / Max	Without battery
●			●	240 - 300	●	●	BS - British standard	250 / 300	500
	●		●	270 - 375		●	DIN	285 / 350	505
			●	280 - 400	●	●	BS - British standard		
		●	●	420 - 600	●	●	BS - British standard	350 / 470	510

BATTERY COMPARTMENT SIZE			PBV20 / 25N3				PBF20 / 25N3R, PBF20 / 25N3S		TRUCK WIDTH b1, mm
			TRUCK LENGTH l1 (l=1150), mm		AST, mm (1 x EU-pallet lengthwise)		TRUCK LENGTH l1 (l=1150), mm	AST, mm (1 x EU-pallet lengthwise)	
Mini	Junior	Senior	Platform up	Platform down	Platform up	Platform down	Platform rear or side entry		
●			1880	2256	2299	2652	2292	2692	740
	●		1960	2336	2379	2732	2372	2772	740
		●	2024	2400	2443	2796	2436	2836	740

Continuing improvement may lead to changes in these specifications

WHEN RELIABILITY IS EVERYTHING...



PREMIA
THE NUMBER ONE

Number one for reliability... number one for productivity... whatever the conditions.

Compact, efficient and resilient, PREMIA powered pallet trucks meet every need.

Like any product bearing the "MITSUBISHI" name our materials handling equipment benefits from the tremendous heritage, huge resources and cutting-edge technology of one of the world's largest corporations – Mitsubishi Heavy Industries Group.

Engineering spacecraft, jet planes, power plants and more, MHI specialises in those technologies where performance, dependability and superiority decide your success or failure...

So when we promise you quality, reliability and value for money, you know it's a guarantee we have the power to deliver.

That's why every model in our award-winning and comprehensive range of lift trucks and warehouse equipment is built to a high specification – to ensure it keeps working for you. Day after day. Year after year. Whatever the job. Whatever the conditions.

YOU'LL NEVER WORK ALONE

As your local authorised dealer, we are here to keep your trucks working – through our extensive experience, our technical excellence and our commitment to customer care.

We are your local experts, backed by efficient channels to the entire organisation of Mitsubishi Forklift Trucks.

No matter where you are, we are close by – with the capability to meet your needs.

Discover how Mitsubishi Forklift Trucks give you more from your local authorised dealer or when you visit our website www.mitforklift.com

Performance specifications may vary depending on standard manufacturing tolerances, vehicle condition, types of tyres, floor or surface conditions, applications or operating environment. Trucks may be shown with non-standard options. Specific performance requirements and locally available configurations should be discussed with your distributor of Mitsubishi forklift trucks. We follow a policy of continual product improvement. For this reason, some materials, options and specifications could change without notice.

info@mitforklift.com

WESM2107 (11/20)
© 2020 MCFE, Mitsubishi Logisnext Americas Inc.

The product shown may be different than the actual configuration based on market requirements.

