

PNEUMATIC TIRE FORKLIFT


8,000-12,000 LB CAPACITY LP GAS, GASOLINE AND DIESEL MODELS

THE PNEUMATIC TIRE FORKLIFT THAT PULLS ITS WEIGHT



COMFORT COMES STANDARD.

STEP INTO THE OPERATOR COMPARTMENT OF AN FG40N1-FG55N1 / FD40NM1-FD55NM1

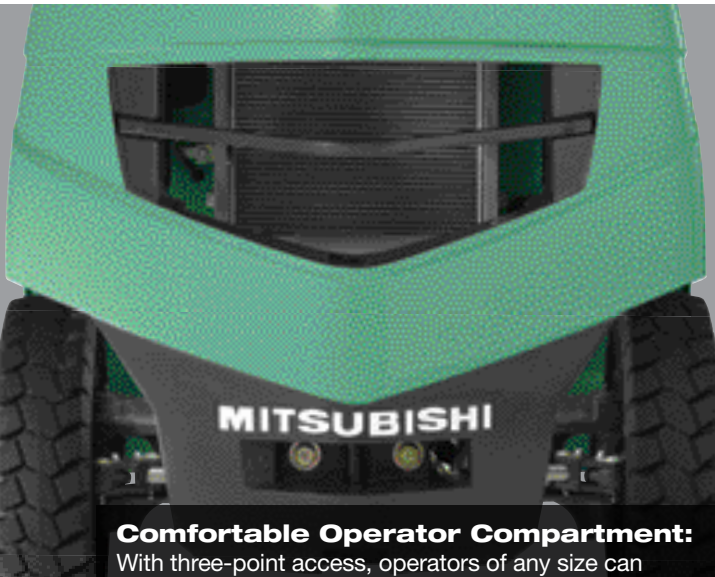

Comfortable Operator Compartment:

With three-point access, operators of any size can easily enter the operator compartment of these Mitsubishi forklift trucks. The large floor space provides maximum operator comfort, especially during long shifts, while the “through the floor” pedal design further reduces operator fatigue and discomfort throughout the day.

Ergonomic Seat: The FG40N1-FG55N1 / FD40NM1-FD55NM1 forklift series features seats with adjustable forward and backward movement, added side support in the back cushion and an anti-cinch seat belt, creating a comfortable work environment for operators of varying heights. An optional full-suspension seat is available on these forklifts for additional support during long shifts.

Enhanced Operator Visibility:


From the standard lighting package, which includes two forward LED work lights, to the lack of crossbars in the overhead guard, the design of the forklift allows for improved visibility in all directions during operation. And with a low-profile counterweight and narrow mast channels, obstructions are kept to a minimum.

Adjustable Steering: The forklift’s steering column is equipped with standard memory tilt steering. Allowing for infinite adjustment in a 12 degree range, the steering column’s “memory” feature retains the operator’s preferred settings for added convenience and comfort during operation.


- Designed for operator comfort
- A comfort seat
- Enhanced visibility
- Memory tilt steering

All come together to create a working environment that reduces fatigue through even the longest shifts.

Every operator is different, so the key to creating a comfortable shift is a flexible design.

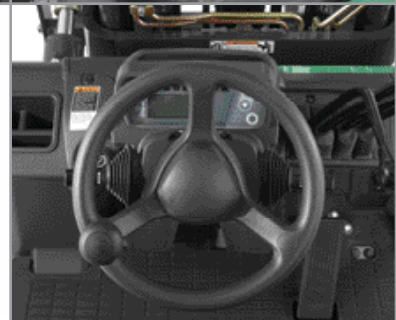

The FG40N1-FG55N1 / FD40NM1-FD55NM1 series is built to help protect the operator and surrounding personnel. Each unit comes standard with the Integrated Presence System (IPS), which is designed to disengage all powered travel and some hydraulic functionality when the operator leaves the normal operating position. Additionally, warning alarms sound and indicators are shown on the display panel, informing the operator and surrounding personnel that the system is engaged.

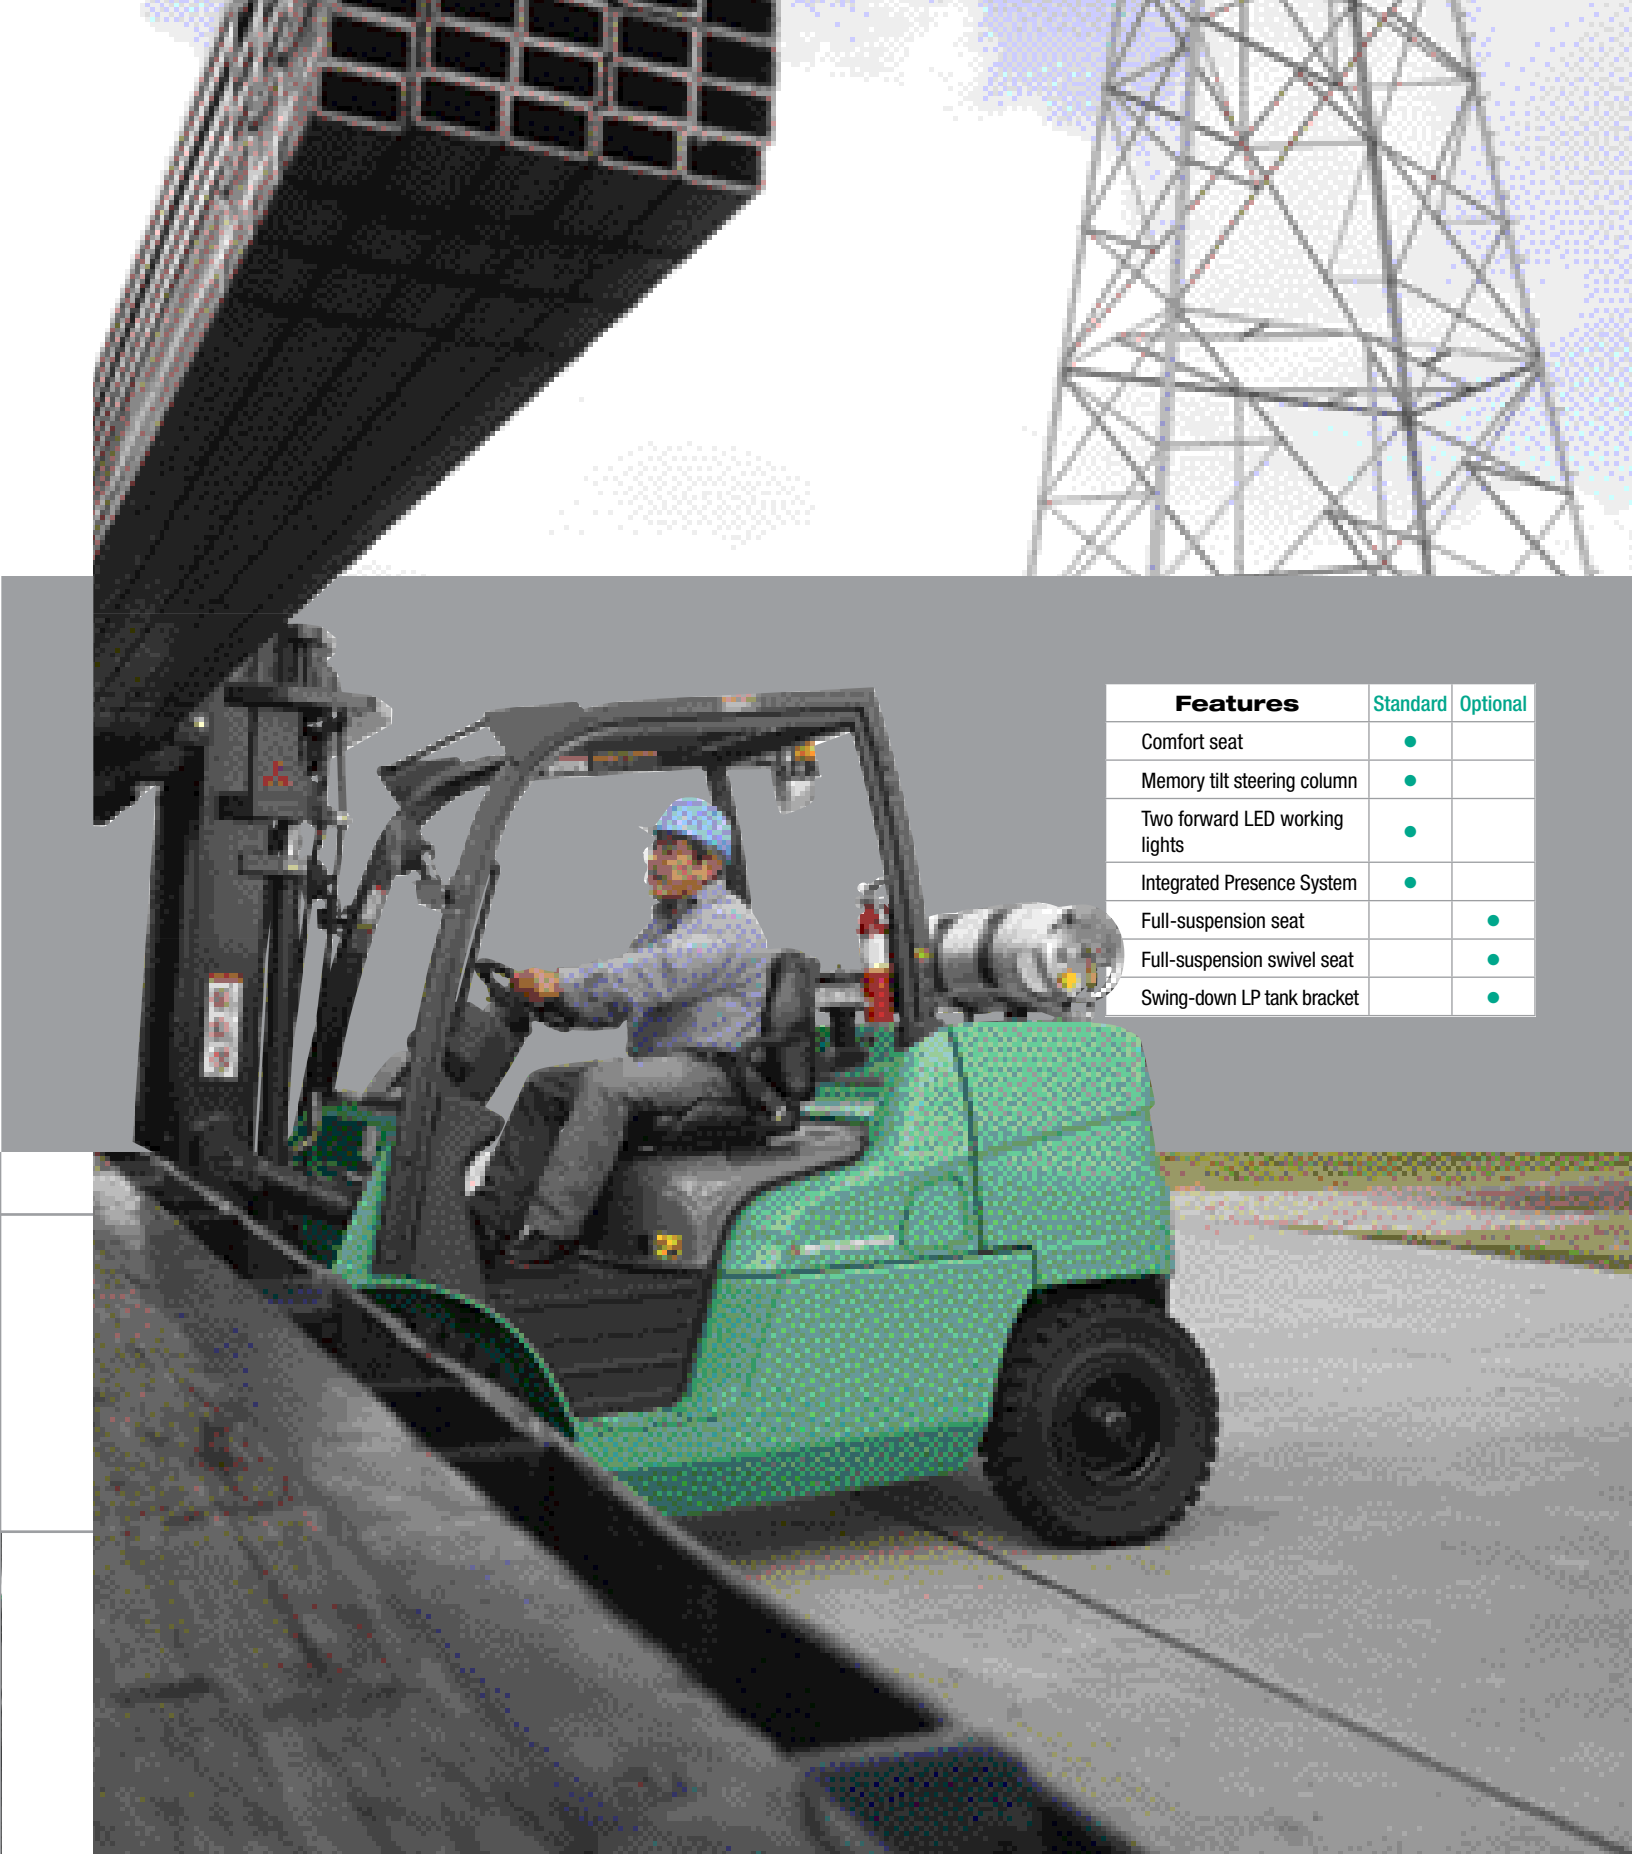

Features	Standard	Optional
Comfort seat	●	
Memory tilt steering column	●	
Two forward LED working lights	●	
Integrated Presence System	●	
Full-suspension seat		●
Full-suspension swivel seat		●
Swing-down LP tank bracket		●

Ask your local dealer about the available options for improved performance, productivity and operator comfort.

POWERFUL EFFICIENCY.



QUALITY COMPONENTS AND EASY MAINTENANCE MEAN INCREASED UPTIME

- Smooth, powerful engines
- Enhanced engine protection
- Reliable components
- Easy service access
- Flexible options

These forklifts are built to perform from the ground up.

Efficient From The Inside Out:

Powered by enviro₂ engines™, these forklifts offer the power you need with a smooth ride. Balanced for low noise and vibration, the operator will experience increased comfort and productivity in many applications. The drive-by-wire throttle control allows for enhanced efficiency, reduced emissions and responsive acceleration, while the exhaust system provides a three-way catalyst that lowers the amount of emissions released into the environment.

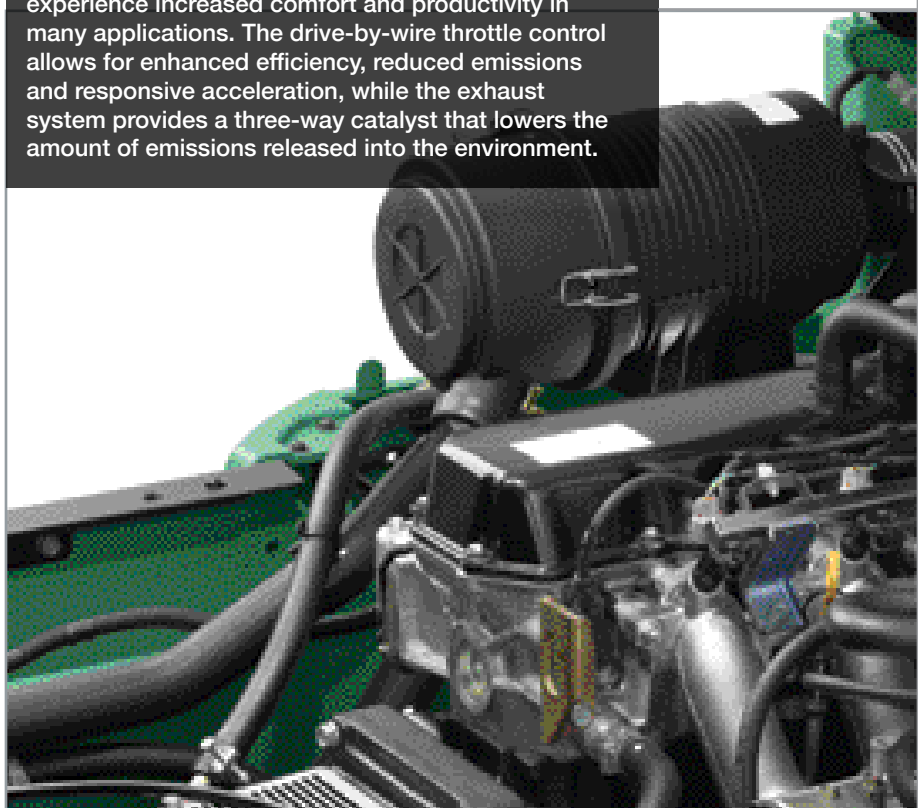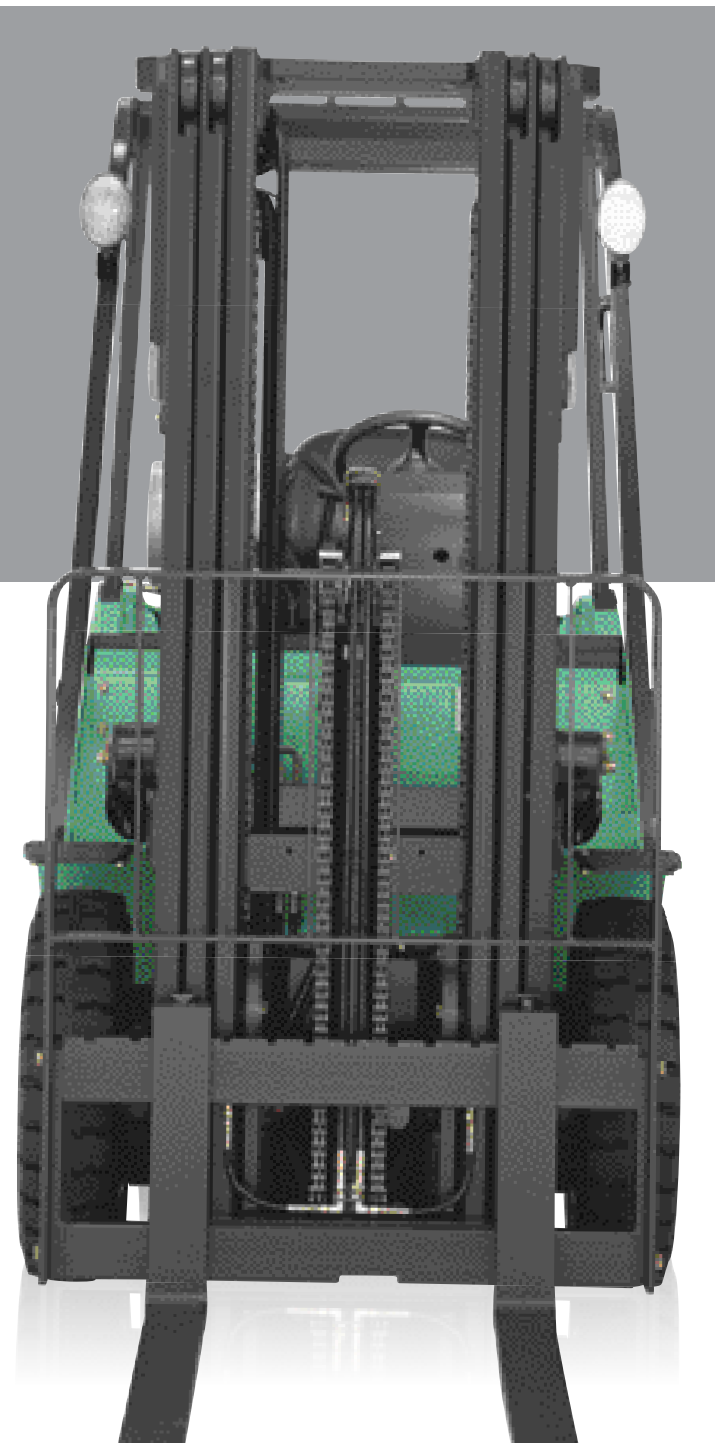

Cool And Quiet: The forklift's fan and radiator system is equipped with a horizontal cross flow cooling system to help keep the engine cool and functioning at peak performance. The corrugated design provides optimal heat exchange, while the aluminum core helps to prevent corrosion. The direct drive fan also reduces noise and necessary maintenance, benefiting your operators and your business.

Engine Protection: Regulated by the Vehicle Control Module, the Engine Protection System keeps the truck running at desirable levels while helping to prevent damage to the forklift, saving you money. If the vital fluids become critically low, RPM levels are automatically lowered and the operator is immediately notified by a light on the dash display.

Easy Service Access: Tool-free access to the engine compartment makes routine maintenance, such as cleaning radiator fins, much easier. Additionally, the Vehicle Control Module is conveniently located under the dashboard cup holder, making it readily accessible.



Additional options are available to customize the forklift for your application:

- Bottler's Tilt
- Service Indicator Options
- Warning Lights
- Dust/Fiber Protection Options
- Debris Resistance Options

CHARACTERISTICS				FG40N1		FD40NM1		FG45N1			
1	Rated capacity	lb	kg	8,000	4,000	8,000	4,000	9,000	4,500		
2	Load center	in	mm	24	500	24	500	24	500		
3	Power	Gasoline / LP Gas			Diesel		Gasoline / LP Gas				
4	Tire type	Pneumatic			Pneumatic		Pneumatic				
5	Wheels	2x / 2			2x / 2		2x / 2				
DIMENSIONS											
6	Maximum fork height (BOF)	in	mm	132	3,350	132	3,350	132	3,350		
7	Free lift	in	mm	5.9	150	5.9	150	5.9	150		
8	Forks – thickness x length x width	in	mm	2x48x5.9	50x1,220x150	2x48x5.9	50x1,220x150	2x48x5.9	50x1,220x150		
9	Fork spacing – out-to-out minimum / maximum	in	mm	12.6 / 46.6	320 / 1,184	12.6 / 46.6	320 / 1,184	12.6 / 46.6	320 / 1,184		
10	Tilt – forward / backward	deg	6° / 10°			6° / 10°		6° / 10°			
11	Overall length to fork face	in	mm	118	3,000	118	3,000	123	3,130		
12	Overall width	single	in	mm	55.7	1,415	55.7	1,415	57.5	1,460	
13		standard duals	in	mm	77.4	1,965	77.4	1,965	77.4	1,965	
14	Overall mast height (mast lowered)	in	mm	91.3	2,320	91.3	2,320	91.3	2,320		
15	Seat effective height	in	mm	42.6	1,082	42.6	1,082	42.6	1,082		
16	Head guard height	in	mm	90.5	2,296	90.5	2,296	90.5	2,296		
17	Overall height (mast extended with backrest)	in	mm	180	4,570	180	4,570	180	4,570		
18	Minimum turning radius	in	mm	102	2,580	102	2,580	107	2,730		
19	Front overhang	in	mm	22.7	577	22.7	577	22.7	577		
20	Minimum aisle for right angle stacking – zero clearance w/o load	in	mm	124	3,157	124	3,157	130	3,307		
PERFORMANCE											
21	travel speed – loaded / empty	mph	km/h	13.7 / 14.0	22.0 / 22.5	13.4 / 13.7	21.5 / 22.0	13.7 / 14.0	22.0 / 22.5		
22	lift speed – loaded / empty	fpm	m/s	112 / 118	0.57 / 0.60	108 / 120	0.55 / 0.61	112 / 118	0.57 / 0.60		
23	lowering speed – loaded / empty	fpm	m/s	98.4 / 98.4	0.5 / 0.5	98.4 / 98.4	0.5 / 0.5	98.4 / 98.4	0.5 / 0.5		
24	Drawbar pull	1 mph (1.6 km) – 1st	lb	N	6,300	28,000	6,100	27,000	6,300	28,000	
25	(forward – loaded)	STALL – 1st	lb	N	8,700	38,500	8,400	37,500	8,400	37,500	
26	Gradeability	1 mph (1.6 km) – 1st	%		32.0		31.1		28.9		
27	(forward – loaded)	STALL – 1st	%		45.8		44.9		40.2		
WEIGHT											
28	Total weight (unloaded – single)	lb	kg	12,920	5,860	13,050	5,920	13,820	6,270		
29	Axle load	with rated load front / rear	lb	kg	18,630 / 2,290	8,450 / 1,040	18,690 / 2,360	8,480 / 1,070	20,240 / 2,580	9,180 / 1,170	
30		without load front / rear	lb	kg	5,750 / 7,170	2,610 / 3,250	5,800 / 7,250	2,630 / 3,290	6,060 / 7,760	2,750 / 3,520	
CHASSIS											
31	Tire size	front, single	in	8.25-15-14PR		8.25-15-14PR		300-15-18PR			
32		front, special duals	in	8.25-15-12PR		8.25-15-12PR		8.25-15-12PR			
33		rear	in	7.00-12-12PR		7.00-12-12PR		7.00-12-12PR			
34	Wheelbase	in	mm	72.8	1,850	72.8	1,850	78.7	2,000		
35	Tread	front, single	in	mm	46.3	1,175	46.3	1,175	46.3	1,175	
36		front, special duals	in	mm	56.9	1,445	56.9	1,445	56.9	1,445	
37		rear	in	mm	46.5	1,180	46.5	1,180	46.5	1,180	
38	Under clearance	at mast	in	mm	5.9	150	5.9	150	5.9	150	
39		at frame	in	mm	8.9	227	8.9	227	8.9	227	
40	Brakes	service	Foot, hydraulic			Foot, hydraulic		Foot, hydraulic			
41		parking	Hand, mechanical			Hand, mechanical		Hand, mechanical			
POWERTRAIN											
42	Engine	model	GK45			Mitsubishi S6S		GK45			
43		rated output	HP	kW	97	72	77	58	97	72	
44		@ engine speed	r.p.m.			2,450		2,300		2,450	
45		maximum torque	lb-ft	N-m	207	280	192	260	207	280	
46		@ engine speed	r.p.m.			1,200		1,700		1,200	
47		cylinder / displacement	cu in	L	6 / 275	6 / 4.5	6 / 305	6 / 5.0	6 / 275	6 / 4.5	
48	Transmission – type			Powershift			Powershift		Powershift		
49	Transmission – number of speeds forward / reverse			2 / 1			2 / 1		2 / 1		
50	Battery – volts			12			12		12		
51	Relief pressure for attachments	psi	bar	2,770	191	2,770	191	2,770	191		
52	Noise (CEN)	dB(A)		84		84		84			

FD45NM1		FG50CN1		FD50CNM1	
9,000	4,500	10,000	5,000	10,000	5,000
24	500	24	500	24	500
Diesel		Gasoline / LP Gas		Diesel	
Pneumatic		Pneumatic		Pneumatic	
2x / 2		2x / 2		2x / 2	
132	3,350	132	3,350	132	3,350
5.9	150	5.9	150	5.9	150
2x48x5.9	50x1,220x150	2x48x5.9	50x1,220x150	2x48x5.9	50x1,220x150
12.6 / 46.6	320 / 1,184	12.6 / 46.6	320 / 1,184	12.6 / 46.6	320 / 1,184
6° / 10°		6° / 10°		6° / 10°	
123	3,130	125	3,170	125	3,170
57.5	1,460	57.5	1,460	57.5	1,460
77.4	1,965	77.4	1,965	77.4	1,965
91.3	2,320	94.5	2,400	94.5	2,400
42.6	1,082	42.6	1,082	42.6	1,082
90.5	2,296	90.5	2,296	90.5	2,296
180	4,570	180	4,570	180	4,570
107	2,730	109	2,760	109	2,760
22.7	577	22.9	582	22.9	582
130	3,307	132	3,342	132	3,342
13.4 / 13.7	21.5 / 22.0	13.7 / 14.0	22.0 / 22.5	13.0 / 13.7	21.0 / 22.0
108 / 120	0.55 / 0.61	96.5 / 102	0.49 / 0.52	92.5 / 104	0.47 / 0.53
98.4 / 98.4	0.5 / 0.5	98.4 / 98.4	0.5 / 0.5	98.4 / 98.4	0.5 / 0.5
6,100	27,000	6,200	27,500	6,000	26,500
8,200	36,500	8,400	37,500	8,300	37,000
28.0		25.9		25.0	
39.4		36.2		35.5	
13,960	6,330	14,970	6,790	15,100	6,850
20,310 / 2,650	9,210 / 1,200	22,190 / 2,780	10,060 / 1,260	22,260 / 2,840	10,100 / 1,290
6,130 / 7,830	2,780 / 3,550	6,330 / 8,640	2,870 / 3,920	6,390 / 8,710	2,900 / 3,950
300-15-18PR		300-15-18PR		300-15-18PR	
8.25-15-12PR		8.25-15-12PR		8.25-15-12PR	
7.00-12-12PR		7.00-12-12PR		7.00-12-12PR	
78.7	2,000	78.7	2,000	78.7	2,000
46.3	1,175	46.3	1,175	46.3	1,175
56.9	1,445	56.9	1,445	56.9	1,445
46.5	1,180	46.5	1,180	46.5	1,180
5.9	150	5.9	150	5.9	150
8.9	227	8.9	227	8.9	227
Foot, hydraulic		Foot, hydraulic		Foot, hydraulic	
Hand, mechanical		Hand, mechanical		Hand, mechanical	
Mitsubishi S6S		GK45		Mitsubishi S6S	
77	58	97	72	77	58
2,300		2,450		2,300	
192	260	207	280	192	260
1,700		1,200		1,700	
6 / 305	6 / 5.0	6 / 275	6 / 4.5	6 / 305	6 / 5.0
Powershift		Powershift		Powershift	
2 / 1		2 / 1		2 / 1	
12		12		12	
2,770	191	2,770	191	2,770	191
84		84		84	

SAFETY STANDARDS

These trucks meet American National Standards Institute/Industrial Truck Standards Development Foundation, ANSI/ITSDF B56.1. UL-Classified by Underwriters Laboratories, Inc., as to fire and electric shock hazard only. Availability: Types G, LP and D standard. Types GS, LPS and DS optional. Users should be aware of, and adhere to, applicable codes and regulations regarding operator training, use, operation and maintenance of powered industrial trucks, including:

- ANSI/ITSDF B56.1.
- NFPA 505, fire safety standard for powered industrial trucks -type designations, areas of use, maintenance and operation.
- Occupational Safety and Health Administration (OSHA) regulations that may apply.

Specifications, equipment, technical data, photos and illustrations based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment.


CHARACTERISTICS			FG50N1		FD50NM1		FG55N1	
1	Rated capacity	lb kg	11,000	5,000	11,000	5,000	12,000	5,500
2	Load center	in mm	24	600	24	600	24	600
3	Power		Gasoline / LP Gas		Diesel		Gasoline / LP Gas	
4	Tire type		Pneumatic		Pneumatic		Pneumatic	
5	Wheels		2x / 2		2x / 2		2x / 2	
DIMENSIONS								
6	Maximum fork height (BOF)	in mm	132	3,360	132	3,360	132	3,360
7	Free lift	in mm	6.3	160	6.3	160	6.3	160
8	Forks – thickness x length x width	in mm	2.4x48x5.9	60x1,220x150	2.4x48x5.9	60x1,220x150	2.4x48x5.9	60x1,220x150
9	Fork spacing – out-to-out minimum / maximum	in mm	12.6 / 46.6	320 / 1,184	12.6 / 46.6	320 / 1,184	12.6 / 46.6	320 / 1,184
10	Tilt – forward / backward	deg	6° / 10°		6° / 10°		6° / 10°	
11	Overall length to fork face	in mm	130	3,310	130	3,310	132	3,360
12	Overall width single	in mm	57.5	1,460	57.5	1,460	57.5	1,460
13	standard duals	in mm	77.4	1,965	77.4	1,965	77.4	1,965
14	Overall mast height (mast lowered)	in mm	94.5	2,400	94.5	2,400	94.5	2,400
15	Seat effective height	in mm	42.6	1,082	42.6	1,082	42.6	1,082
16	Head guard height	in mm	90.5	2,296	90.5	2,296	90.5	2,296
17	Overall height (mast extended with backrest)	in mm	181	4,590	181	4,590	181	4,590
18	Minimum turning radius	in mm	114	2,890	114	2,890	116	2,940
19	Front overhang	in mm	23.7	602	23.7	602	23.7	602
20	Minimum aisle for right angle stacking – zero clearance w/o load	in mm	137	3,492	137	3,492	139	3,542
PERFORMANCE								
21	travel speed – loaded / empty	mph km/h	13.7 / 14.0	22.0 / 22.5	13.0 / 13.7	21.0 / 22.0	13.4 / 14.0	21.5 / 22.5
22	lift speed – loaded / empty	fpm m/s	96.5 / 102	0.49 / 0.52	92.5 / 104	0.47 / 0.53	96.5 / 102	0.49 / 0.52
23	lowering speed – loaded / empty	fpm m/s	98.4 / 98.4	0.5 / 0.5	98.4 / 98.4	0.5 / 0.5	98.4 / 98.4	0.5 / 0.5
24	Drawbar pull 1 mph (1.6 km) – 1st	lb N	6,100	27,000	6,000	26,500	6,100	27,000
25	(forward – loaded) STALL – 1st	lb N	8,400	37,500	8,300	37,000	8,400	37,500
26	Gradeability 1 mph (1.6 km) – 1st	%	23.3		22.6		21.5	
27	(forward – loaded) STALL – 1st	%	33.0		32.3		30.7	
WEIGHT								
28	Total weight (unloaded – single)	lb kg	15,960	7,240	16,090	7,300	16,690	7,570
29	Axle load							

FD55NM1	
12,000	5,500
24	600
Diesel	
Pneumatic	
2x / 2	
132	3,360
6.3	160
2.4x48x5.9	60x1,220x150
12.6 / 46.6	320 / 1,184
6° / 10°	
132	3,360
57.5	1,460
77.4	1,965
94.5	2,400
42.6	1,082
90.5	2,296
181	4,590
116	2,940
23.7	602
139	3,542
13.0 / 13.7	21.0 / 22.0
92.5 / 104	0.47 / 0.53
98.4 / 98.4	0.5 / 0.5
5,800	26,000
8,300	37,000
20.8	
30.1	
16,840	7,640
25,770 / 3,070	11,690 / 1,390
6,990 / 9,850	3,170 / 4,470
300-15-18PR	
8.25-15-12PR	
7.00-12-14PR	
84.6	2,150
46.3	1,175
56.9	1,445
46.5	1,180
5.9	150
8.9	227
Foot, hydraulic	
Hand, mechanical	
Mitsubishi S6S	
77	58
2,300	
192	260
1,700	
6 / 305	6 / 5.0
Powershift	
2 / 1	
12	
2,770	191
84	

Call-out numbers shown in the diagram below correspond to the first column of the specifications chart.

FG40N1-FG55N1

FD40NM1-FD55NM1

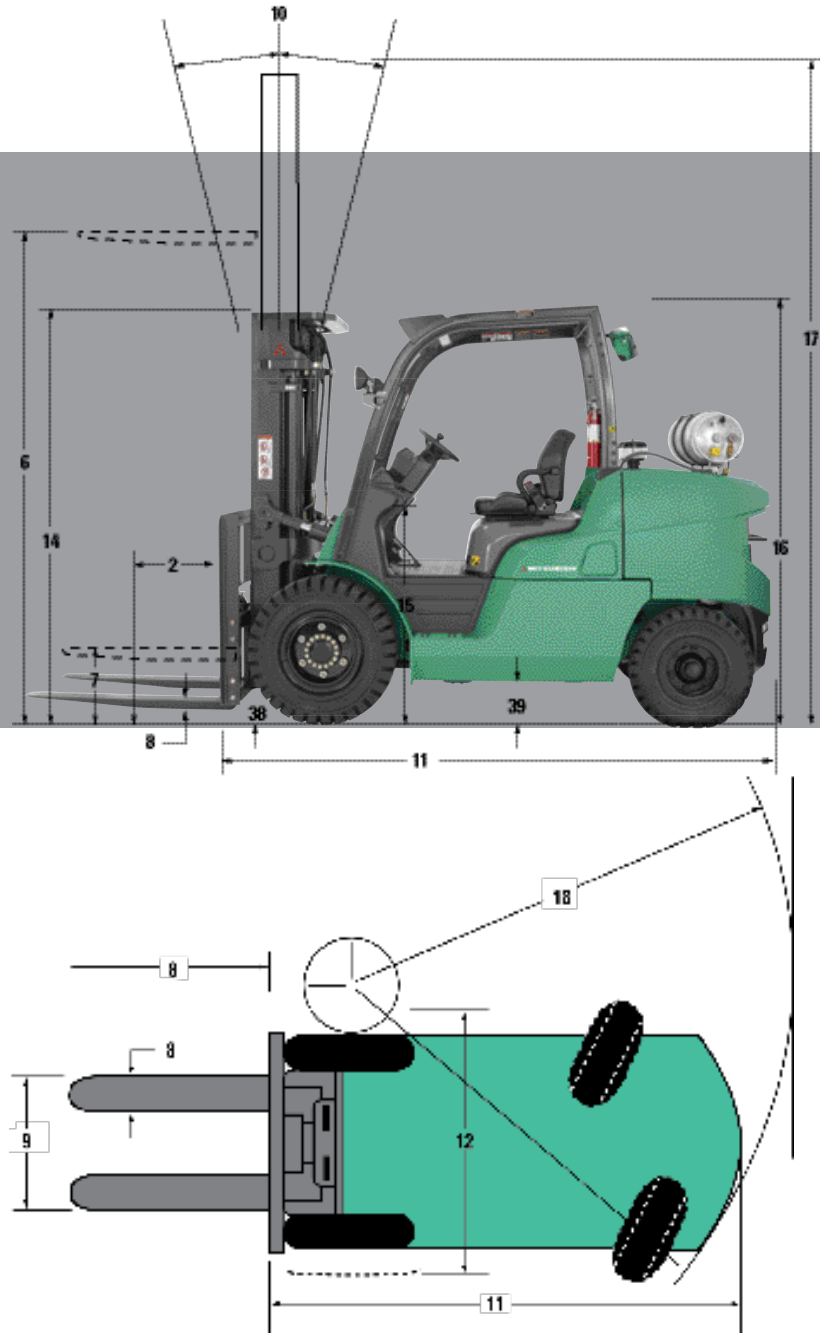

GOING THE EXTRA MILE.

HELPING KEEP OPERATORS AND PRODUCTS SECURE REQUIRES CONSTANT AWARENESS



Mitsubishi Forklift Trucks offers a selection of options designed specifically to help minimize risk and keep operators, pedestrians and your assets secure in the work environment.

Integrated Presence System:

The FG40N1-FG55N1 / FD40NM1-FD55NM1 series is built to help protect the operator and surrounding personnel. Each forklift comes standard with the Integrated Presence System (IPS), which is designed to disengage all powered travel and some hydraulic functions when the operator leaves the normal operating position. A warning alarm will also sound and an indicator on the dash will appear if the operator leaves the compartment without applying the parking brake or forgets to fasten their seat belt.

Additional Options To Help Minimize Risk:

- **Rear grab bar with horn button** – This option allows the operator to easily and comfortably access the horn while traveling in reverse, while the ergonomic placement of the rear grab bar creates a secure grip.
- **Ground speed control** – This programmable feature regulates top speeds and acceleration in environments where caution should be exercised.
- **Swing-down LP tank bracket** – Helping to reduce operator strain, this option makes it easier to remove and replace the empty fuel tank.
- **Light, strobe and alarm packages** – In dimly lit work areas, rear LED work lights and strobe packages enhance operator visibility, while increasing the visibility of the forklift to others working in the same area.
- **Fuel Saver Mode** – This innovation allows the acceleration curve to be limited, while allowing top speeds to still be achieved. In doing this, the forklift is able to maintain up to 95% production while being up to 14% more fuel efficient. It can also help prevent tire wear from excessive tire spin upon acceleration.
- **Thermoformed overhead guard cover** – This plastic cover, offered in both clear or tinted, will help protect the operator from the elements while still allowing visibility through the overhead guard.

The Integrated Presence System provides audible and visual reminders to the operator.

Ground speed control allows you to set limits for the forklift's top speeds, especially useful in applications with pedestrian traffic.



FG40N1-FG55N1 FD40NM1-FD55NM1

8,000-12,000 LB CAPACITY PNEUMATIC TIRE FORKLIFT

Exceptional Value

More Than 296,000 Parts To Keep You Running

Mitsubishi Forklift Trucks offers several parts programs, all designed to bring you top performance and convenience for your material handling needs. Contact your local dealer to put our services to work for you.

Support To Fit Your Operation

Find out why more companies are relying on Mitsubishi forklift truck dealers to keep their fleet operating at top performance. Our efficiency provides customers with a better return on investment, and qualified service technicians, diverse parts inventory and unparalleled selection of service options can help reduce your total cost of ownership.

Extensive Dealer Network

The Mitsubishi forklift truck dealer network is dedicated to finding the right forklift solution for your business. With more than 300 dealer locations, you can rely on your local dealer to provide the service you need when you need it most.



Manufactured with superior quality and exceptional value, Mitsubishi forklift trucks are supported by an extensive dealer and field support network located throughout North and South America. Don't forget to ask your local Mitsubishi forklift truck dealer about details on factory retail programs, financing plans and additional options and dealer services like planned maintenance and operator training.