

# UNICARRIERS<sup>®</sup>

## □ FORKLIFT □



2B1L15U - 2B2L35CU Series

Electric Powered Forklifts

1500 - 3500 kg. Capacities | Pneumatic Tire



# 2B Series Applications

---

This series comes with a cool, exciting body design, and it is equipped with the full complement of functions and the ease of operation that lots of users are looking for. These trucks provide solutions to meet operators' requirements. This comes with the reliable quality and the increased efficiency as well as productivity in the operating site. These electric powered models include 1.0-3.5 ton trucks.





# NEVER QUIT.

**It defines our forklifts and the company that builds them.**

Over the course of a century, the company known as UniCarriers took shape. As we grew and evolved into a US manufacturer with a global reach in nearly 100 countries worldwide, much has changed, but one thing hasn't: our mission. UniCarriers is committed to providing you with the ultimate in reliability, performance, and value.

And that commitment can be seen in the 2B Series. For versatility, performance and bottom line value, there's nothing like the 2B Series forklift.



## **Control**

These flexible electric forklifts deliver amazing performance inside and out



## **Reliability**

Discover reliability features that can cut downtime and help keep your business up and running



## **Comfort**

Let your drivers feel the benefits from our comfort & productivity features



## **Safety**

Safety is everybody's business, and the 2B Series is all business when it comes to safety



To learn more, and find a dealer near you, visit [Logisnextamericas.com/UniCarriers](http://Logisnextamericas.com/UniCarriers)





# Control:

YOUR PRODUCTS DESERVE PURE PRECISION.  
WE PUT IT AT YOUR FINGERTIPS.

## Automatic Torque Increase

When starting up a ramp or moving with a heavy load on the forks, the automatic torque increase function automatically detects the weight of loads on the forks and increases the output of the traction motor appropriately, allowing easier starts, especially when going up a ramp.

## Operation Interlock System

If the operator is not on the seat or leaves the operator's compartment, the Operation Interlock System is activated to lock the travel and load handling operations of the truck. This safety system prevents unintended movement if the operator of the truck is not in the correct driving position or a control is moved unintentionally when the operator is not in the seat.







# Reliability: YOUR FORKLIFT NEEDS TO BE READY WHEN YOU NEED IT. UPTIME IS NOT OPTIONAL.

## Adjustable Operating Characteristics

The operator can select the most suitable operating mode, for traveling or load handling, to suit their driving skills and the working conditions.

## Customizing the Operating Characteristics

The driving or load handling characteristics can be finely tuned according to the operator's skills and the working conditions. The truck is designed with flexibility to respond to both agile operation by experienced operators and slower operation by inexperienced operators.

## Go Longer with Regeneration

Innovative technology in the truck translates movements such as coasting, plugging, downhill travel, braking, speed suppression and controlled rollbacks into kinetic energy that charges the truck's battery as it's being used - extending operating time.

## Dependability Built In

Warehouse work can be tough, and you need a machine you can rely on, through good times and bad. These trucks are designed to be rugged, reliable performers that give operators more performance - with less hassle and maintenance.

- Better Efficiency with an AC Motor: High-quality AC motor drives these trucks, delivering smooth rides, faster acceleration and greater responsiveness - while optimizing the lifespan of your lift trucks battery and keeping maintenance requirements low.
- IPX4 Waterproofing: Whether in a warehouse or in the rain, you can count on these trucks to keep running reliably, thanks to IPX4 waterproofing.





# Comfort:

YOUR OPERATOR SHOULD BE AS PRODUCTIVE  
AT THE END OF THE SHIFT AS AT THE BEGINNING.

The exterior of this series adds functional beauty which supports daily load handling operations at worksites. These trucks are packed with ergonomic improvements, including:

- Excellent forward and rearward visibilities
- Assist grips and large steps for easy entry and exit of the truck
- Operator compartment for efficient and comfortable operation, with sufficient overhead clearance
- Low center of gravity for excellent stability during turning
- Counterweight reconfigured to follow a subtle curve that does not interfere with the operator's rear visibility, which provides direct visibility to obstacles in the aisle

In addition, these trucks provide outstanding basic truck performance, allowing easier load handling operations.



## Additional comfort features include:

**Excellent Visibility** – The all-around view is superb by the design of the overhead guard, the load backrest and the counterweight shape. This excellent visibility has positively contributes to work efficiency and safety for the operator.

**Easy Access** – This series has a low mounting step as well as a convenient assist grip, with sufficient overhead clearance for smooth entry. The operator will enjoy this safe and quick easy-on & easy-off configuration.

**Rear Assist Grip (With Horn)** – The seating arrangement with rear assist grip helps ensure the operator can maintain a comfortable driving position while moving in reverse, without having an awkward posture. This rear assist grip has an integrated warning horn to alert workers around when the truck is moving backwards.







# Safety:

YOUR HEAVY-DUTY FORKLIFT SHOULD PROTECT ITS OPERATOR, ITS LOAD AND ITSELF.

## See Clearly:

With an excellent view of the cargo and travel path.



## Increased Operator Awareness

Other awareness features that operators will appreciate include an easily accessible and unobstructed emergency stop button, a highly visible optional orange seatbelt, and optional password system that restricts the access and operation of the truck to authorized personnel.



## Maximum Travel Speed Function

- Switching to “Turtle” speed: Sets the maximum travel speed to the value specified by the operator.
- Limiting maximum speed: Controls travel speed so the truck does not exceed the upper limit preset.

# Specifications

CHARACTERISTICS					
0	Model		<b>2B1L15U</b>	<b>2B1L18U</b>	<b>2B2L20U</b>
1	Rated Capacity	kg	1,500	1,750	2,000
2	Load Center	mm	500	500	500
3	Motor Type		AC	AC	AC
4	Operator Type		Seated	Seated	Seated
DIMENSIONS					
5	Lift Height	mm	3,000	3,000	3,000
6	Free Lift	mm	115	115	145
7	Tilt Angle	deg	7 / 11	7 / 11	7 / 11
8	Carriage - Class II, III	mm	Class II	Class II	Class II
9	Fork Dimensions – T / W / L	mm	35 x 100 x 1,070	35 x 100 x 1,070	45 x 100 x 1,070
10	Fork Spread (max. / min.)	mm	920 / 240	920 / 240	975 / 240
11	Overall Length	mm	3,150	3,190	3,375
12	Length To Fork Face	mm	2,080	2,120	2,305
13	Overall Width	mm	1,100	1,115	1,155
14	Height - Mast Lowered	mm	1,990	1,990	1,995
15	Height – Mast Extended	mm	4,055	4,055	4,055
16	Height of Overhead Guard	mm	2,110	2,110	2,110
17	Front Overhang	mm	395	395	445
18	Minimum Turning Radius	mm	1,850	1,880	2,030
PERFORMANCE					
19	Travel Speed - loaded / unloaded (pneumatic tire)	km/h	14.0 / 16.0	13.5 / 15.5	14.0 / 16.0
20	Travel Speed - loaded / unloaded (no-puncture tire)	km/h	13.0 / 15.0	12.5 / 14.5	13.0 / 15.0
21	Lifting Speed - loaded / unloaded	mm/s	350 / 540	350 / 540	290 / 470
22	Lowering Speed - loaded / unloaded	mm/s	500 / 470	500 / 470	480 / 440
23	Maximum Gradeability - 3 min. rating, 1.5km/h +	%	19	17	19
WEIGHTS					
24	Service Weight without battery	kg	2,250	2,495	2,960
25	Service Weight with battery	kg	2,920	3,165	3,780
26	Axle Loading - loaded (front / rear)	kg	3,920 / 500	4,320 / 595	5,090 / 690
27	Axle Loading - unloaded (front / rear)	kg	1,465 / 1,455	1,450 / 1,715	1,850 / 1,930
WHEELS / CHASSIS					
28	Tires - number front / rear		2 / 2	2 / 2	2 / 2
29	Tire Size - front	mm	6.00-9 Solid	21x8-9 Solid	21x8-9 Solid
30	Tire size - rear	mm	5.00-8 Solid	5.00-8 Solid	18x7-8 Solid
31	Wheelbase	mm	1,410	1,410	1,520
32	Tread - front	mm	930	925	955
33	Tread - rear	mm	900	900	965
34	Ground Clearance - at mast	mm	110	110	115
35	Ground Clearance - at middle of wheelbase	mm	110	110	110
36	Service Brake		2xDrum	2xDrum	2xDrum
37	Parking Brake		Mechanical	Mechanical	Mechanical
38	Power Steering type		Electro-hydraulic Power Steering	Electro-hydraulic Power Steering	Electro-hydraulic Power Steering
ENGINE / TRANSMISSION					
39	Battery type		JIS	JIS	JIS
40	Battery Voltage	V/Ah	48 / 415	48 / 415	48 / 510
41	Drive Motor - 60 min. rating	kW	7.0	7.0	8.5
42	Hydraulic Motor5 min. rating	kW	9.5	9.5	11.5
43	Power Steering Motor - 60 min. rating	kW	1.5	1.5	1.5
44	Motor Control		AC Inverter	AC Inverter	AC Inverter



	<b>0</b>	<b>2B2L25U</b>	<b>2B2L30U</b>
	<b>1</b>	2,500	3,000
	<b>2</b>	500	500
	<b>3</b>	AC	AC
	<b>4</b>	Seated	Seated
	<b>5</b>	3,000	3,000
	<b>6</b>	145	140
	<b>7</b>	7 / 11	7 / 11
	<b>8</b>	Class II	Class III
	<b>9</b>	45 x 100 x 1,070	45 x 122 x 1,070
	<b>10</b>	975 / 240	995 / 280
	<b>11</b>	3,415	3,575
	<b>12</b>	2,345	2,505
	<b>13</b>	1,155	1,255
	<b>14</b>	1,995	2,015
	<b>15</b>	4,055	4,055
	<b>16</b>	2,110	2,260
	<b>17</b>	445	485
	<b>18</b>	2,215	2,260
	<b>19</b>	14.0 / 16.0	13.5 / 15.5
	<b>20</b>	13.0 / 15.0	12.5 / 14.5
	<b>21</b>	260 / 470	320 / 550
	<b>22</b>	480 / 440	450 / 450
	<b>23</b>	16	16
	<b>24</b>	3,335	3,915
	<b>25</b>	4,190	5,070
	<b>26</b>	5,610 / 1,080	7,155 / 915
	<b>27</b>	2,030 / 2,160	2,390 / 2,680
	<b>28</b>	2 / 2	2 / 2
	<b>29</b>	21x8-9 Solid	28x9-15 Solid
	<b>30</b>	18x7-8 Solid	6.50-10 Solid
	<b>31</b>	1,520	1,680
	<b>32</b>	955	1,030
	<b>33</b>	965	980
	<b>34</b>	115	130
	<b>35</b>	110	120
	<b>36</b>	2xDrum	2xDrum
	<b>37</b>	Mechanical	Mechanical
	<b>38</b>	Electro-hydraulic Power Steering	Electro-hydraulic Power Steering
	<b>39</b>	JIS	JIS
	<b>40</b>	48 / 565	72 / 470
	<b>41</b>	8.5	11.0
	<b>42</b>	11.5	15.0
	<b>43</b>	1.5	1.7
	<b>44</b>	AC Inverter	AC Inverter

# Features & Options

## Features

GENERAL EQUIPMENT	
Full hydraulic power steering	●
Tilt steering	●
Load backrest	●
Steering synchronizer	●
Speed limit switch	●
Tilt cylinders	●
Meter panel	●
– parking brake warning	●
– seat belt reminder	●
– battery discharge indicator	●
– hour meter	●
Lamps	●
– head lamps	●
– turn signal lamps	●
– rear combination lamps	●
ORS suspension seat	●
Operation interlock system (traction and hydraulics)	●
Overhead guard	●
Floor mat	●
Rear view mirror	●
Back buzzer	●
Rear Assist grip with horn button	●
Operation manual	●


\* Products and specifications are subject to change without notice.

This specification sheet only provides technical values for the standard truck. Non-standard tires, different masts, additional equipment, etc., could produce other values. Rights reserved for technical changes and improvements.

Equipping these models with a power source (e.g. Lithium-ion, Hydrogen Fuel cell, etc.) that has not been previously approved by the factory is considered a modification. Per ISO 3691-1, please consult with your factory representative prior to installing any non OEM power source that has not been previously approved.

● Standard



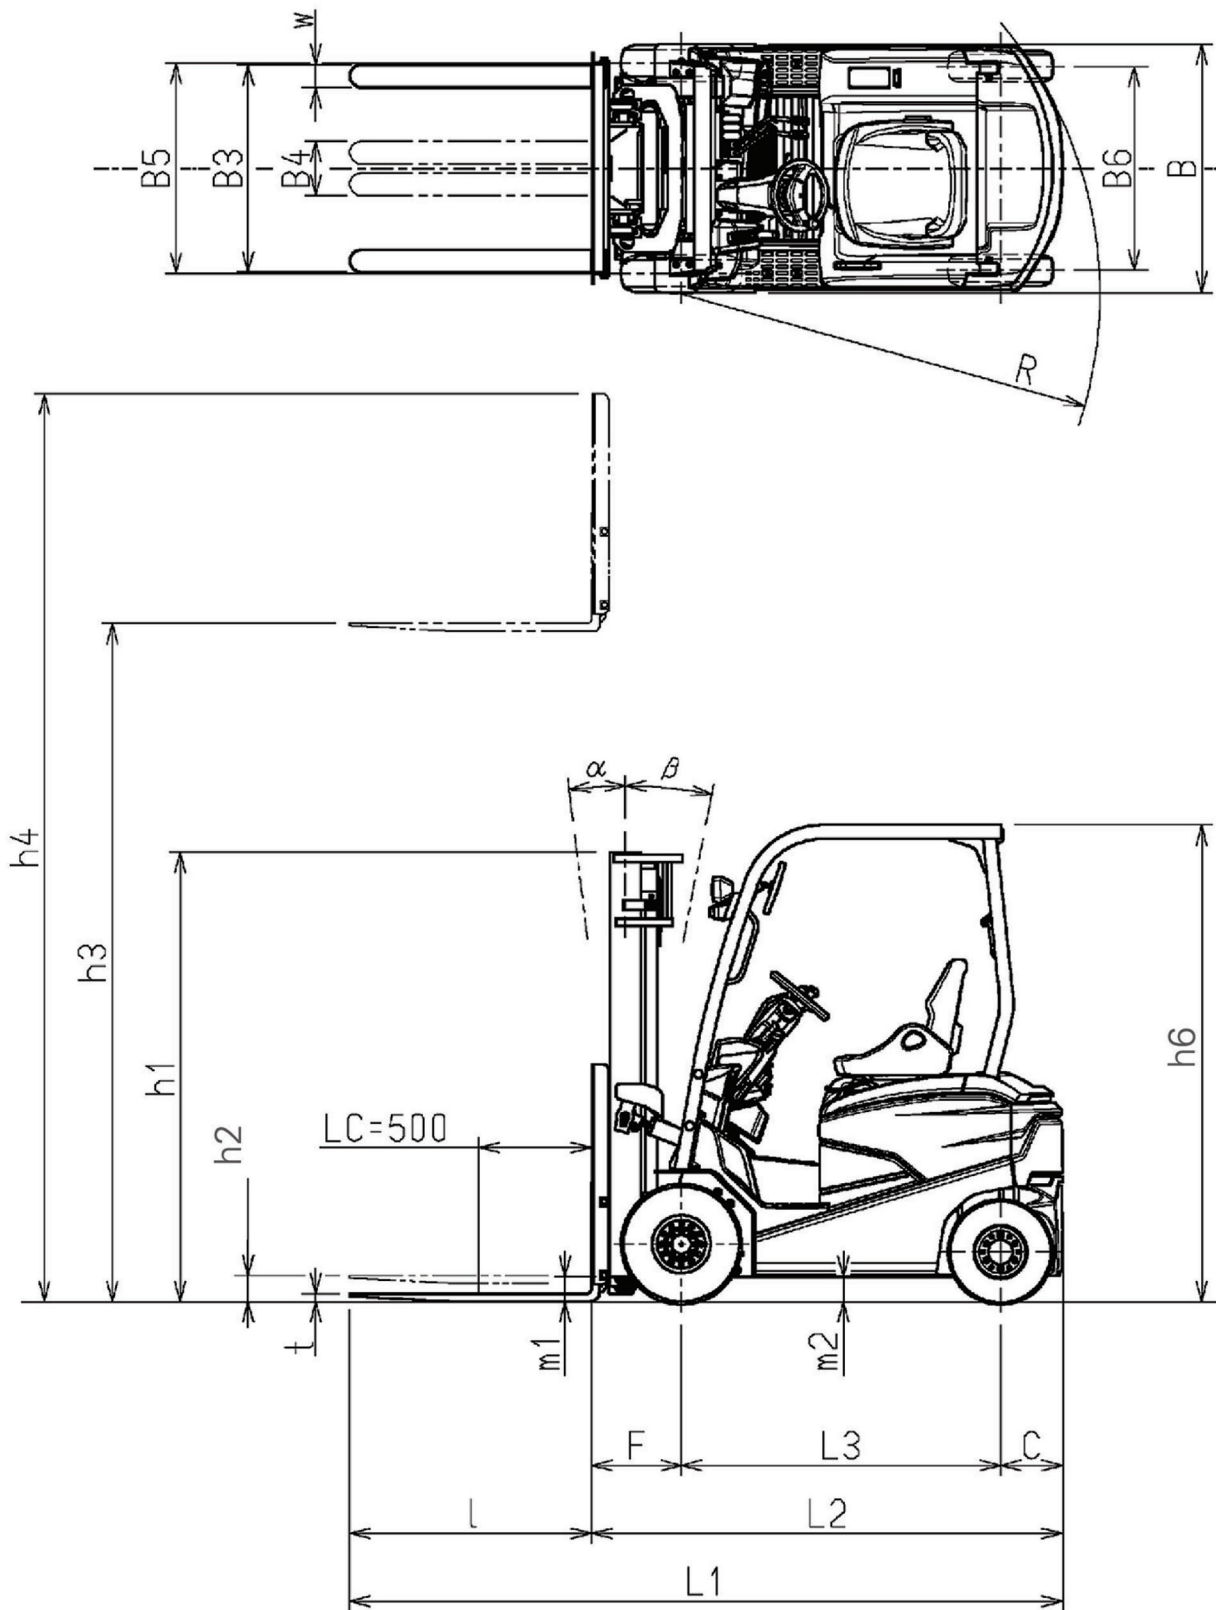

# Reliability.

It's the defining trait of our company and our forklifts.



UniCarriers' roots extend back over 100 years, and over that time, strong, reliable performance has always been the hallmark of our organization, our people and our equipment.

Today, our unrivaled reliability continues to provide UniCarriers' customers with a competitive edge. And together, we move the merchandise that moves world commerce with greater efficiency, economy and reliability.

When it comes to providing forklifts that make a difference for our customers and theirs...



## We Never Quit.

**UNI CARRIERS**  
[ F O R K L I F T ]

[Logisnextamericas.com/UniCarriers](https://Logisnextamericas.com/UniCarriers)

SB-2B12B2 06-2025 Printed in U.S.A.

© 2025 Mitsubishi Logisnext Americas Inc. UniCarriers® is a registered trademark of Mitsubishi Logisnext Co., Ltd. Mitsubishi Logisnext Americas, Inc. reserves the right to make product changes relating to colors, equipment, specifications or available options without notice. For more information, contact your UniCarriers Forklift representative.

